


# BALANCES.COM SK / SK-D / SK-Z Series

## Digital Scales

Removable Stainless Steel Pan

Resolution  
Up to  
1/5,000!

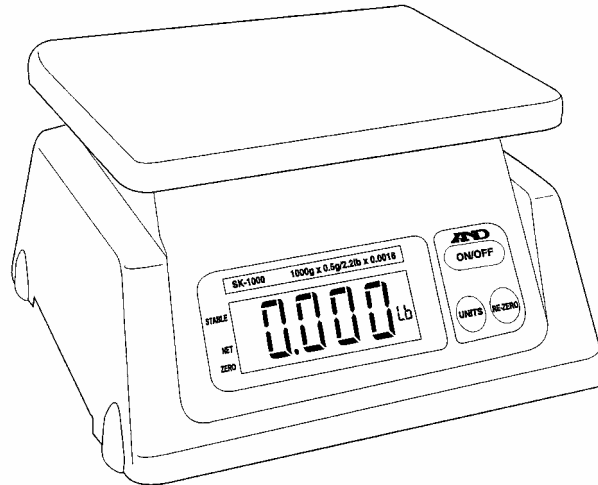

Large 1" LCD  
Display

Rugged  
Design

Splash Proof

### Features

- Portable
- Battery Power (6 'D' size batteries not included)
- Lb/Metric Mode Selection (SK-5001 is Gram only)
- Fractional and Decimal Ounce Models Available (SK-Z Series)
- Dual Display Available (SK-D Series)
- NSF Accepted
- NTEP Approved (except SK-5001) (SK-Z is Non-NTEP)
- NSF Certified (SK & SK-Z Series - except SK-5001)
- 2 Year Warranty
- Auto Power Off (5 min.) to preserve battery life
- Low Battery Indication
- AC Adapter (option)
- Large, removable stainless steel pan (9" x 7.5")
- Re-Zero Function

Model	Capacity	Resolution	Pan Size
SK-1000	1000 g	0.5 g	190 x 230 mm
SK-2000	2000 g	1 g	190 x 230 mm
SK-5000	5000 g	2 g	190 x 230 mm
SK-5001	5000g	1g	190 x 230 mm
SK-10K	10 kg	5 g	190 x 230 mm
SK-20K	20 kg	10 g	190 x 230 mm
SK-30K	30 kg	20 g	190 x 230 mm

NTEP Approval #98-086

Non-NTEP: SK-5001 and SK-Z  
Series

#### Fax-on-Demand

(800) 726-7099, Press 2 / (408) 263-2278

Document #999

[www.andweighing.com](http://www.andweighing.com)

last saved:1/23/02

**A&D**  
A&D WEIGHING  
...Clearly a Better Value



1555 McCandless Drive  
Milpitas, CA 95035, USA  
Toll Free: (800) 726-7099  
Phone: (408) 263-5333  
Fax: (408) 263-0119

## SK / SK-D / SK-Z Series Specifications

	SK-1000/D	SK-2000/D	SK-5000/D	SK-5001	SK-10K/D
Grams (g)	1000 x 0.5g	2000 x 1g	5000 x 2g	5000 x 1g	-
Kilogram (kg)	-	-	-	-	10 x 0.005kg
Pounds (lb)	2.2 x 0.001lb	4.4 x 0.002lb	11 x 0.005lb	-	22 x 0.01lb
Linearity	± 1g	± 2g	± 4g	± 4g	± 0.01kg
Repeatability/Std. Deviation	0.5g	1g	2g	2g	0.005kg
Weight	Approx. 1.6 kg. / 3.53 lb				

	SK-20K/D	SK-30K/D	SK-2000Z	SK-5000Z	SK-20KZ
Grams (g)	-	-	2000 x 1g	5000 x 2g	-
Kilogram (kg)	20 x 0.01kg	30 x 0.01kg	-	-	20 x 0.01kg
Pound (lb)	44 x 0.02lb	66 x 0.05lb	4.4 x 0.002lb	11 x 0.005lb	44 x 0.02lb
Lb/oz fractional ounce	-	-	4lb 6oz x 1/16 oz	11 lb x 1/8 oz	44 lb x 1 oz
Lb/oz decimal ounce	-	-	4 lb 6 oz x 0.1 oz	11 lb x 0.1 oz	44 lb x 1 oz
Linearity	± 0.02kg	±0.02kg	± 2g	± 4g	± 0.02kg
Repeatability/Std Dev.	0.01kg	0.02kg	1g	2g	0.01kg
Weight	1.9 kg. / 4.19 lb		Approx. 1.6 kg. / 3.53 lb		1.9 kg. / 4.19 lb


All Models		
Display	25mm/ 1 inch, 7 segment LCD	
Platform Size	230 (W) x 190 (D) mm / 9.05 (W) x 7.48 (D) inches	
Dimensions	mm	244 (W) x 232 (D) 137 (H)
	inch	9.61 (W) x 9.13 (D) x 5.39 (H)
Power	6 'D' size batteries (not included) or AC adapter (optional)	
Battery Life	Approx. 600 hours (manganese type), 1200 hours (alkaline at 20° C / 68° F)	
Operating Temp.	-10°C~40°C / 14°F~104°F HR less than 85%	

Specifications are subject to change without notice

Available with **Dual Display**, Front and Back! Available on all models except SK-Z & SK-5001.  
Add "D" to end of part number

### Options:

- FV-05 AC Adapter (110V)
- FV-06 AC Adapter (220V)

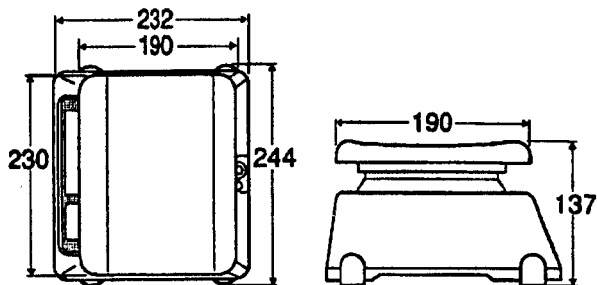

### Fax-on-Demand

(800) 726-7099, Press 2 / (408) 263-2278

Document #999

[www.andweighing.com](http://www.andweighing.com)

last saved: 1/23/02



1555 McCandless Drive  
Milpitas, CA 95035, USA  
Toll Free: (800) 726-7099  
Phone: (408) 263-5333  
Fax: (408) 263-0119