


Signum Complete Scale

Option A9 - UniCOM: Analog output port / YD001SW-A0

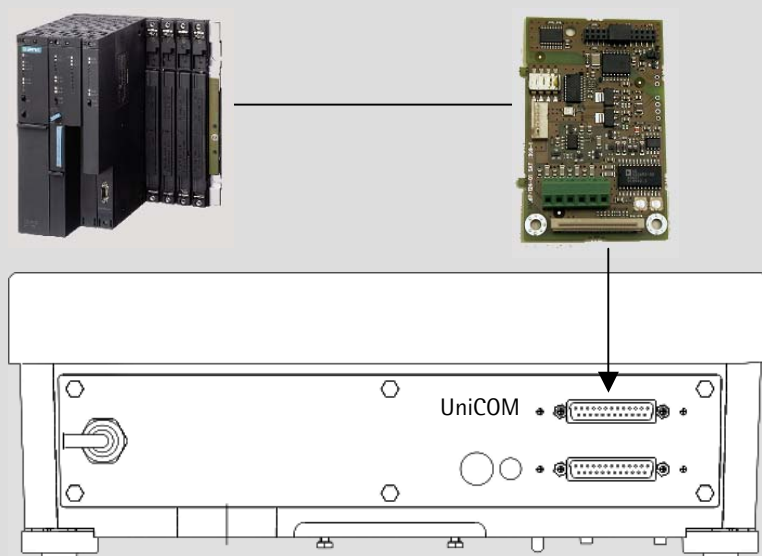

- The analog output port enables connection of a programmable logic controller or an external analog display unit

Data on Analog Interface

Electrically isolated data output

Can be used as voltage interface: standard: 0 to 10 V, or as current interface: 0 to 20 mA / 0 to 24 mA / 4 to 20mA (set by a switch)

- : 16 bit resolution
- : Current output:

Output error (at 25°C):	0.15%	(max)
Drift of the output error:	25 ppm/°C	(typical)
- : Voltage output:

Output error (at 25°C):	1.00%	(max)
Drift of the output error:	100 ppm/°C	(typical)

Connectable devices

Controllers with analog input